



- Notes:
1. Material: RoHS compliant 12AWG (.08") Aluminum
  2. Break all sharp edges prior to powder coat. Mask all threads prior to coating.
  3. Part is to be powder coated with Cardinal color C241-BK109. Thickness of coating must not exceed 0.08mm.
  4. Ink mark in area indicated with first initial of your company name

DRAWN BY	SINNEMA	7/18/14
MATERIAL	See Notes	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:		
DECIMALS	.X $\pm$ .75	ANGLES X $^{\circ}$ $\pm$ 1 $^{\circ}$
	.XX $\pm$ .25	
	.XXX $\pm$ .125	63
	.XXXX $\pm$ .050	
BREAK EDGES .005/.020 FILLET RADIUS .005/.020		



**Sinnema Design Services**  
 seth.sinnema@gmail.com  
 Phone: (303) 250-8218  
 Fax: 1-267-393-7872

TITLE		<b>Right Plate, Mini</b>	
SIZE	DWG NO.	REV.	
A	PP-FP0052	C	
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 1 OF 2

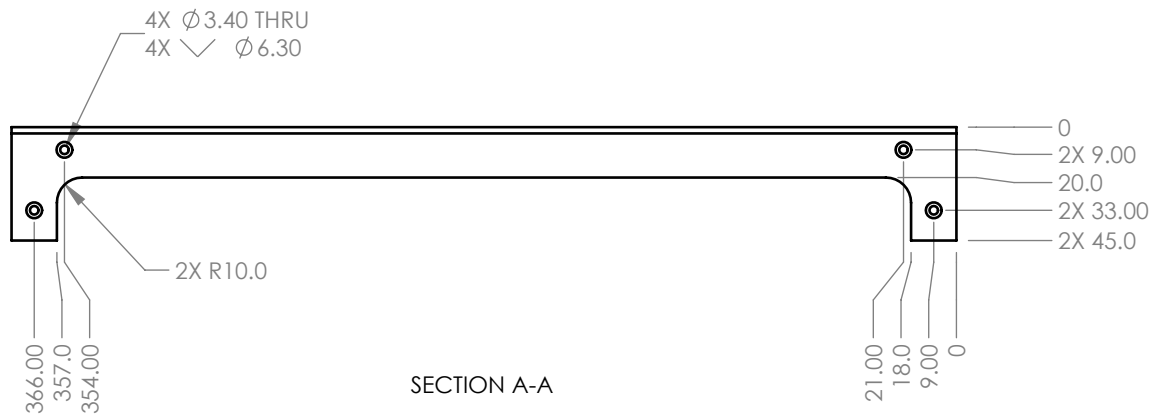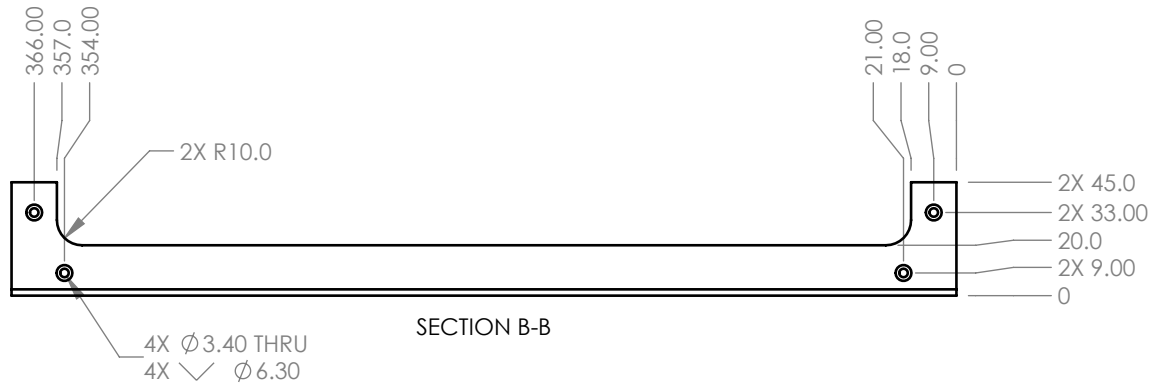

TITLE		Right Plate, Mini	
SIZE A	DWG NO.	PP-FP0052	REV. C
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 2 OF 2