

Notes:

1. Material: RoHS compliant 12AWG (.08") Aluminum
2. Break all sharp edges prior to powder coat. Mask all threads prior to coating.
3. Part is to be powder coated with Cardinal color C241-BK109. Thickness of coating must not exceed 0.08mm.
4. Ink mark in area indicated with first initial of your company name



DRAWN BY	SINNEMA	7/18/14
MATERIAL	See Notes	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:		
DECIMALS	ANGLES	
.X ± .75	X° ± 1°	
.XX ± .25	63	
.XXX ± .125	✓	
.XXXX ± .050		
BREAK EDGES .005/.020		
FILLET RADIUS .005/.020		




Sinnema Design Services

seth.sinnema@gmail.com
 Phone: (303) 250-8218
 Fax: 1-267-393-7872

TITLE		Bottom Plate, Mini	
SIZE	DWG NO.	REV.	
A	PP-FP0053	C	
SCALE	1:3	SHEET	1 OF 3
DO NOT SCALE DRAWING			

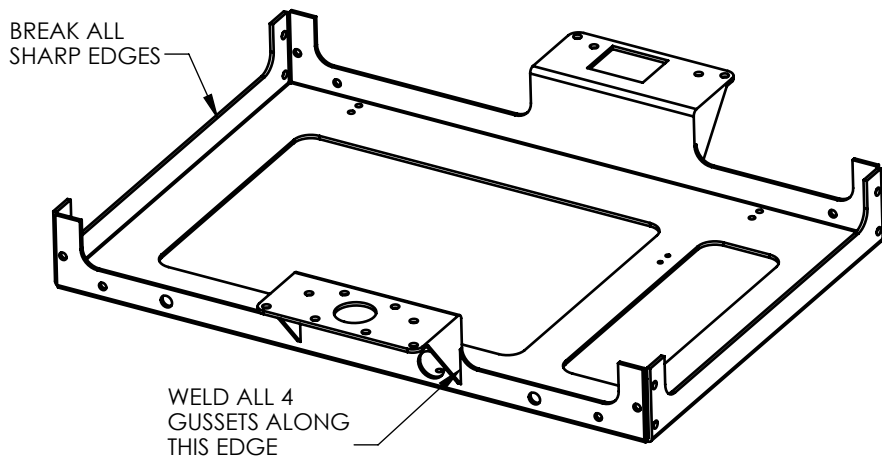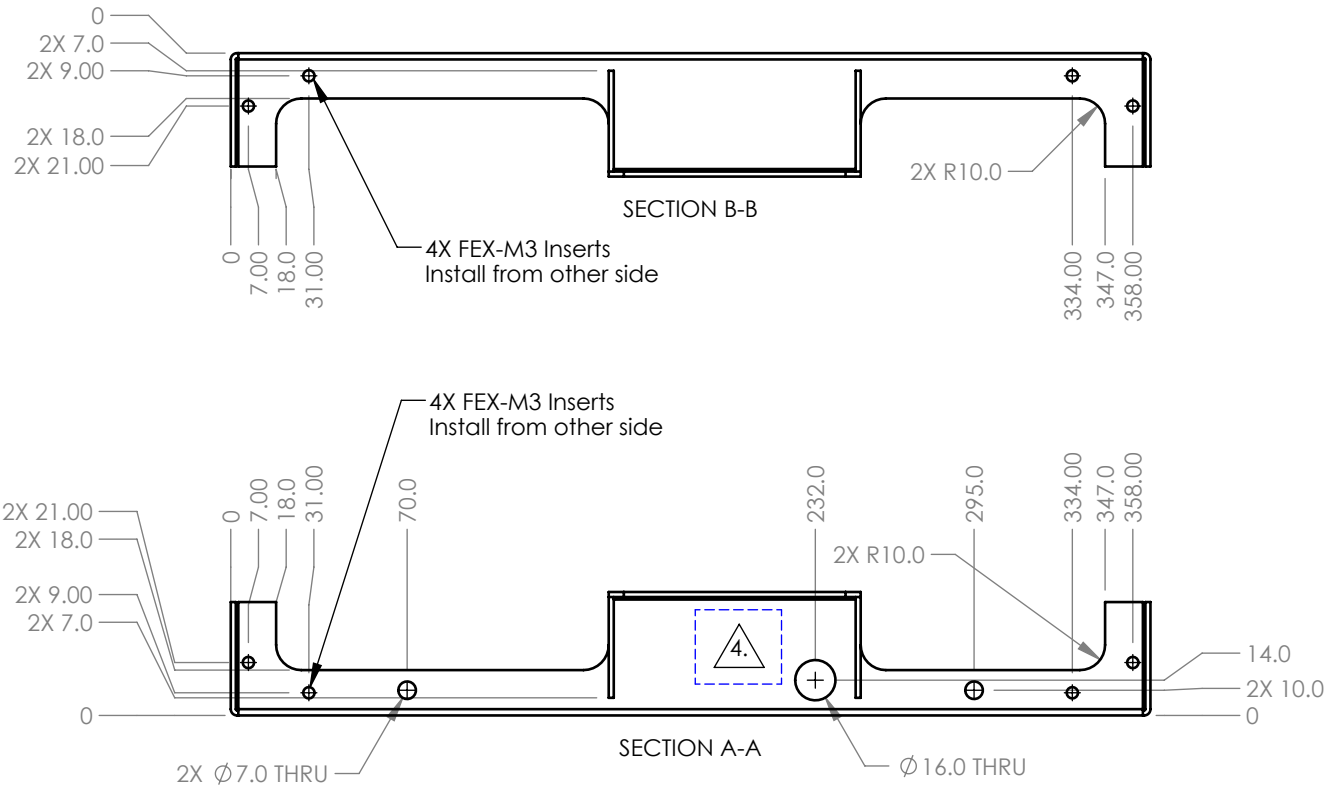

TITLE		Bottom Plate, Mini	
SIZE A	DWG NO.	PP-FP0053	
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 2 OF 3
			REV. C

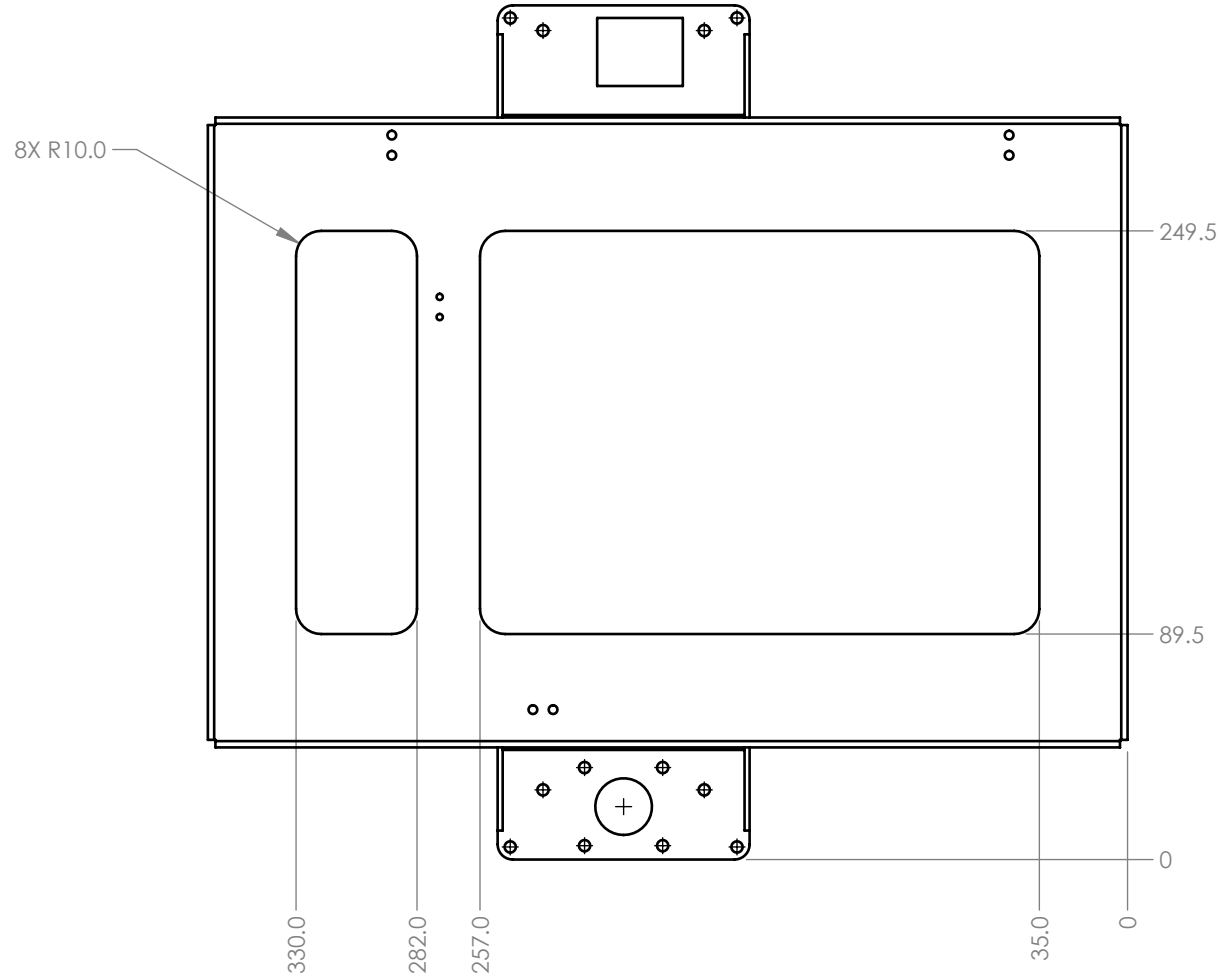

TITLE		Bottom Plate, Mini	
SIZE	DWG NO.		REV.
A	PP-FP0053		C
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 3 OF 3