

Notes:

1. Material: RoHS compliant 12AWG (.08") Aluminum
2. Break all sharp edges prior to powder coat. Mask all threads prior to coating.
3. Part is to be powder coated with Cardinal color C241-BK109. Thickness of coating must not exceed 0.08mm.

4. Ink mark in area indicated with first initial of your company name.

DRAWN BY
SINNEMA 7/18/14

MATERIAL
SEE NOTES

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:

DECIMALS	ANGLES
.X ± .75	X° ± 1°
.XX ± .25	
.XXX ± .125	
.XXXX ± .050	63

BREAK EDGES .005/.020
FILLET RADIUS .005/.020



Sinnema Design Services

seth.sinnema@gmail.com
Phone: (303) 250-8218
Fax: 1-267-393-7872

TITLE

Electronics Case, Mini

SIZE A DWG NO.

PP-FP0056

REV. E

SCALE


1:3

DO NOT SCALE DRAWING



SHEET

1 OF 2

FH-M3-10ZI Insert
Install from this side

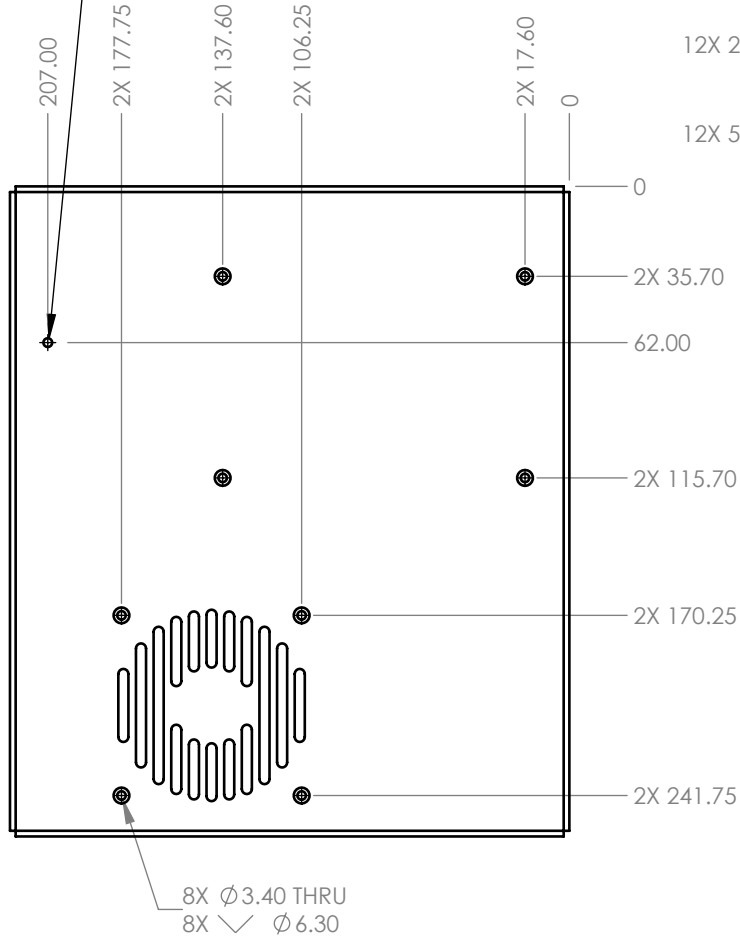

SECTION C-C

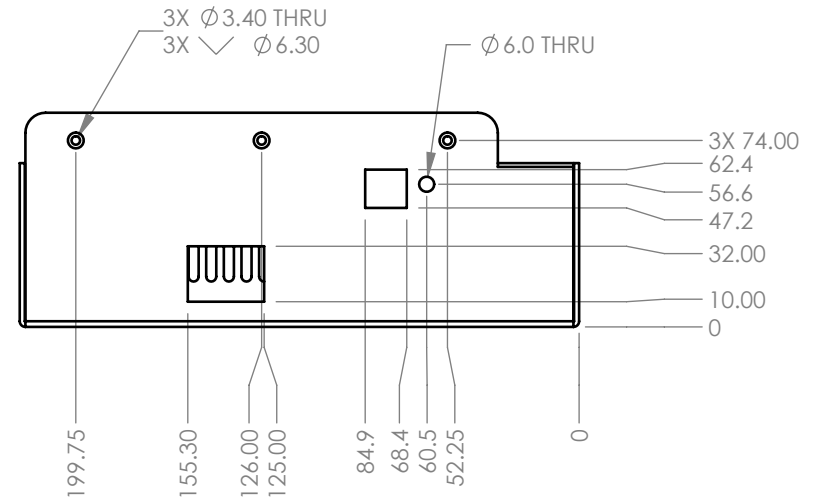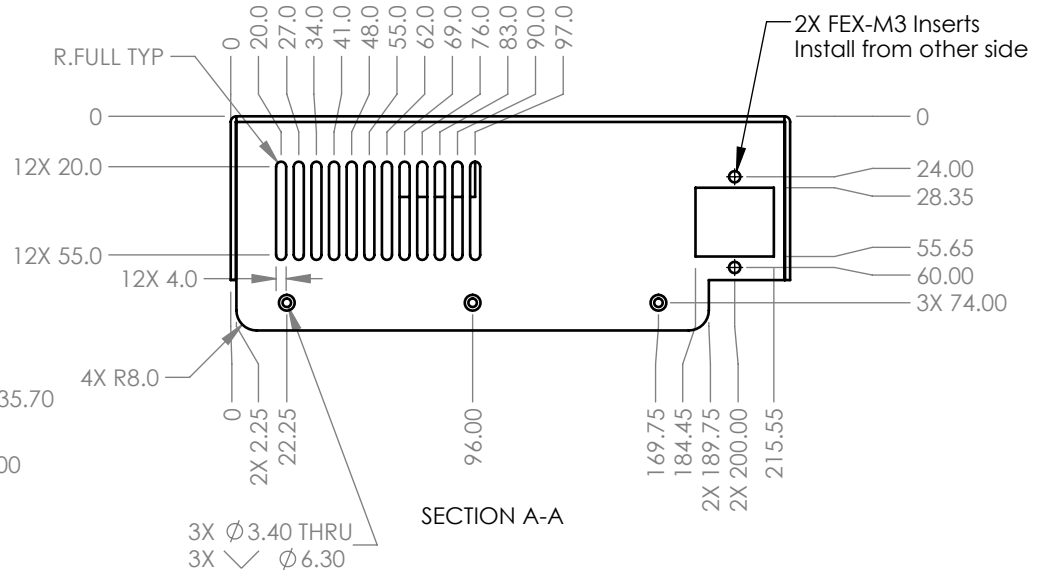

SECTION B-B

TITLE			
Electronics Case, Mini			
SIZE	DWG NO.		REV.
A	PP-FP0056		E
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 2 OF 2