

**Notes:**

1. Material: RoHS compliant 12AWG (0.08") Aluminum
2. Break all sharp edges and mask all threads prior to powder coat.
3. Part is to be powder coated with Cardinal color C241-BK109.  
Thickness of coating must be between 0.05mm and 0.12mm.

4. Mark in indicated area with company identifier



5. Parts must be clean, free of oil and debris

**Rev Date Description**

Rev	Date	Description
G	2/7/18	Added note 5, hang point callouts.
F	8/16/16	Thickness of powder coat specification changed.
E	7/27/16	Countersink removed from 2 masked holes for manufacturability.

DRAWN BY: <b>bam</b>	DATE: <b>7.6.16</b>
MATERIAL: <b>See Notes</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:	
DECIMALS .X±.75 .XX±.25 .XXX±.125 .XXXX±.050	ANGLES X°±1° 63°
BREAK EDGES 0.1/0.5 FILLET RADIUS 0.1/0.5	

 <b>ALEPH OBJECTS INCORPORATED</b>		626 West 66th Street Loveland, Colorado 80538, USA Phone +1-970-377-1111 www.alephobjects.com	
		TITLE <b>Right side mini</b>	
SIZE <b>A</b>	DWG NO. <b>PP-FP0052</b>	REV. <b>G</b>	
SCALE <b>1:3</b>	DO NOT SCALE DRAWING	SHEET <b>1 of 2</b>	

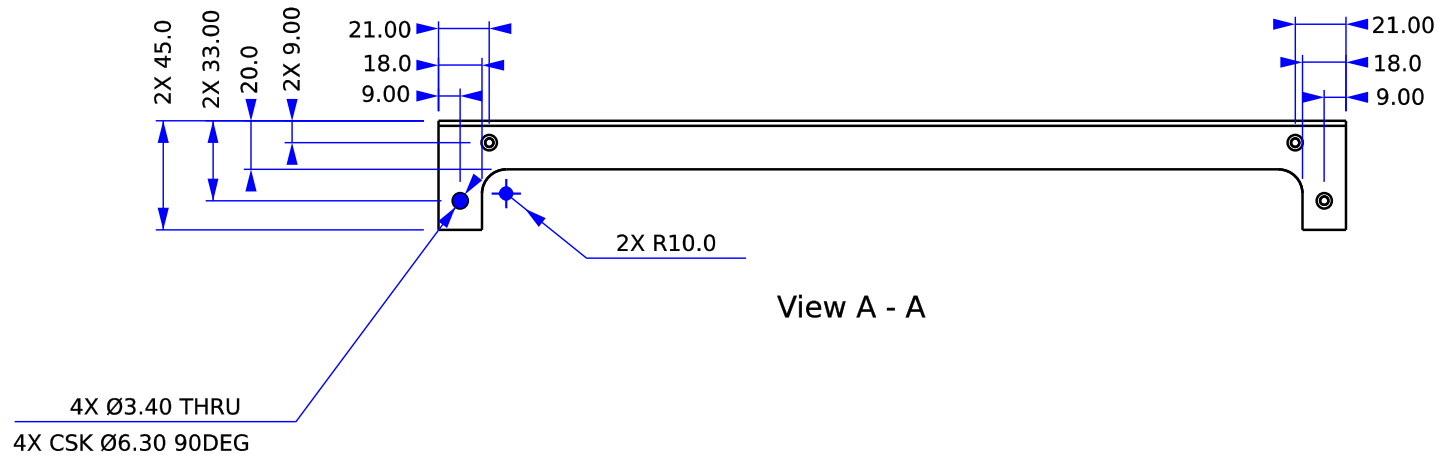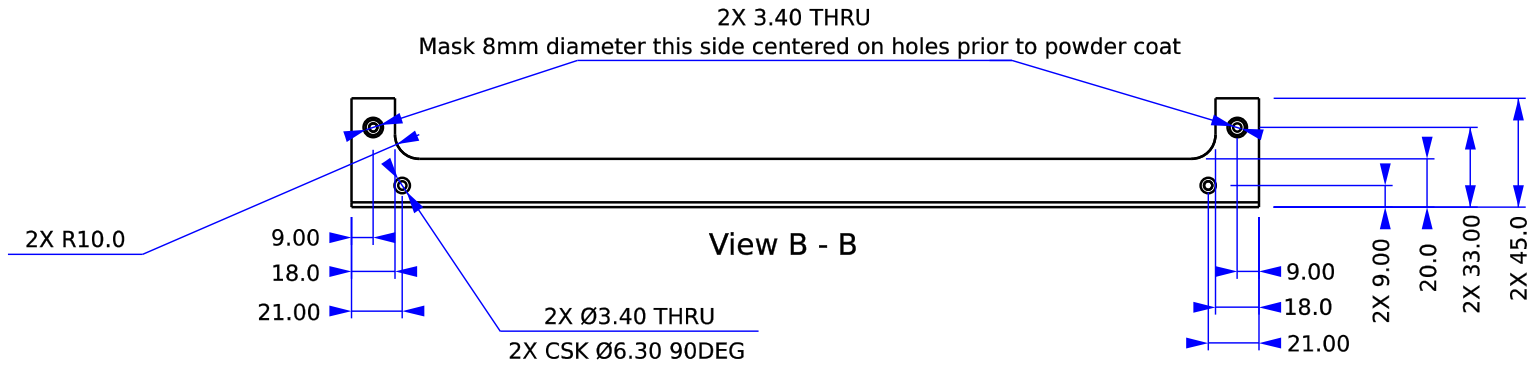

TITLE			
Right side mini			
SIZE	DWG NO.	REV.	
A	PP-FP0052	G	
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 2 of 2