


Notes: Unless otherwise specified
 Cut length +- 3mm
 Ferrule strip length +-0.5mm
 Power connector strip length +-0.5mm




Rev	Date	Changes	Change by
A	1/7/19	Add ferrite and heat shrink tube	JW
B	1/30/19	Add strip tolerance	JW
C	4/17/19	Specify ferrite core location	KJ

DRAWN BY West		DATE
CHECKED BY		DATE
EL-HR0148		

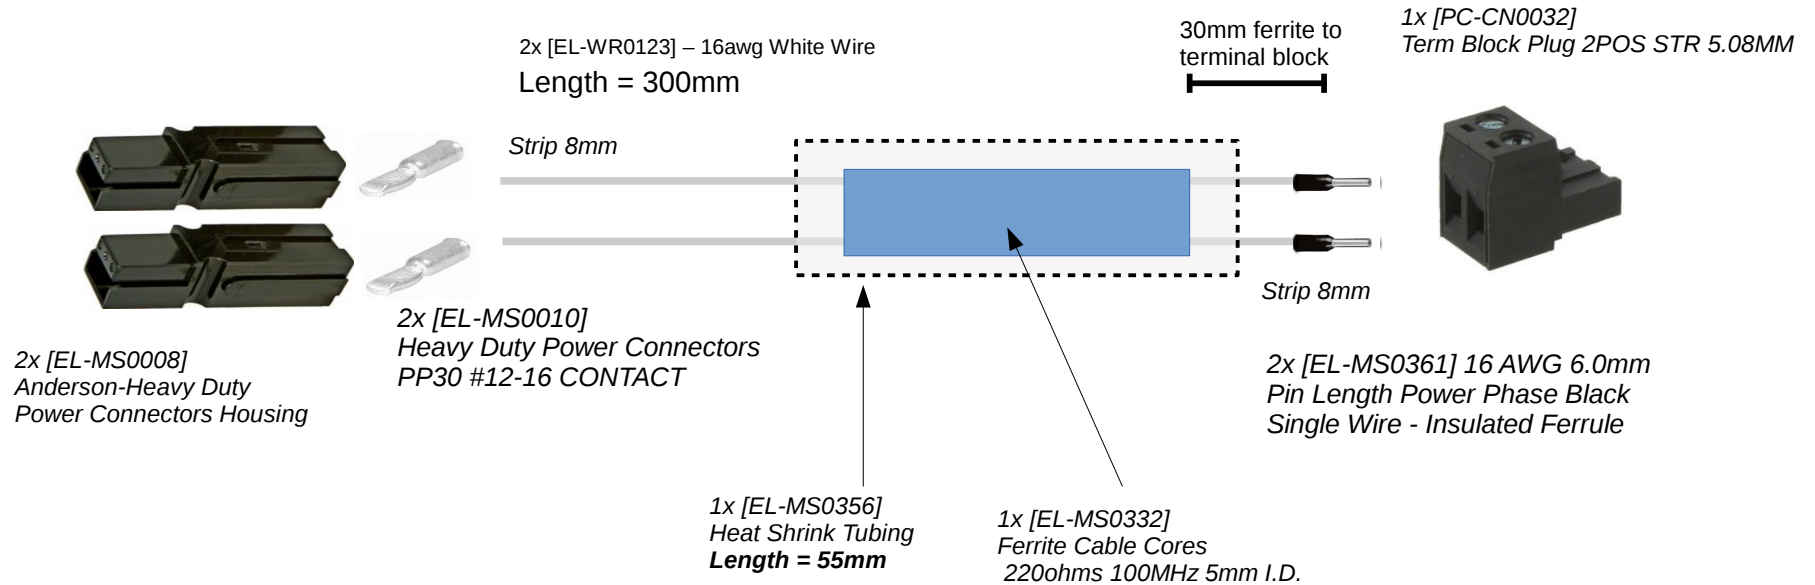

**ALEPH
OBJECTS**
INCORPORATED



TITLE
CB Bed Power Harness, Assembled

FILE NAME EL-HR0148_CB_Bed_Power_Harness.odg	SHEET 1	REV. C
---	------------	-----------

AO P/n	qty	unit	Supplier	supplier P/n
EL-MS0008	2	pce	sager	879-1327G6-BK
EL-WR0123	600	mm	allcable	HU15691626WE
EL-MS0010	2	pce	sager	1332-BK
EL-MS0361	2	pce	titi	FSD78-6-D
PC-CN0032	1	pce	titi	395300002
EL-MS0332	1	Pce	sager	28B0434-000
EL-MS0356	55	mm	Electronics distributors corp	84-60500